


NOTES:


1. PLACE SONOTUBES AT POST LOCATIONS DURING WALL CONSTRUCTION.
2. HAND CUT GEOGRID AROUND SONOTUBE.
3. GROUT FENCE POSTS INTO SONOTUBES.
4. FENCE DESIGNED BY OTHERS.

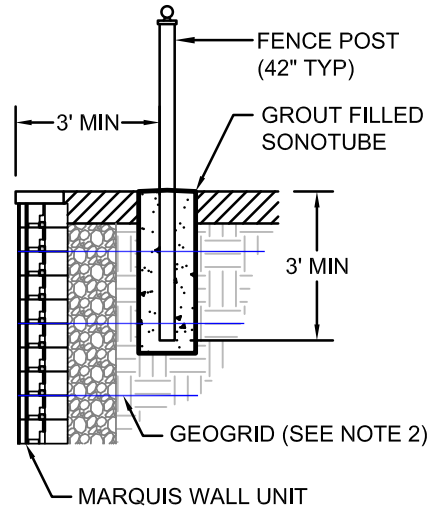

1
1 FENCE POST WITH SONO-TUBE

NOTES:

1. SLEEVE-IT® SD1 SYSTEM CANTILEVER BASE LOCATED 24" BELOW FINISHED GRADE.
2. LIMIT FENCE OR RAIL POST SIZE TO 4" X 4" MAXIMUM.
3. PEDESTRIAN RAIL SYSTEMS LIMITED TO 42" HEIGHT AND MAXIMUM POST SPACING OF 8 FEET.
4. FENCE SYSTEMS:
 - 4.1. CHAIN LINK: POST 8 FEET ABOVE FINISHED GRADE, SPACING 8 FEET MAXIMUM.
 - 4.2. ORNAMENTAL (STEEL, ALUMINUM, WROUGHT IRON): POST 6 FEET ABOVE FINISHED GRADE, SPACING 10 FEET MAXIMUM.
 - 4.3. OPEN BOARD / GAP BOARD (70% OPEN): POST 6 FEET ABOVE FINISHED GRADE, SPACING 6 FEET MAXIMUM.
5. THE USE OF PRIVACY CLOTH OR SCREENING IS STRICTLY PROHIBITED.
6. SEE PRODUCT MANUFACTURER FOR ADDITIONAL DETAILS AND PRODUCT APPLICATION UPDATES FOR THE SLEEVE-IT SYSTEM

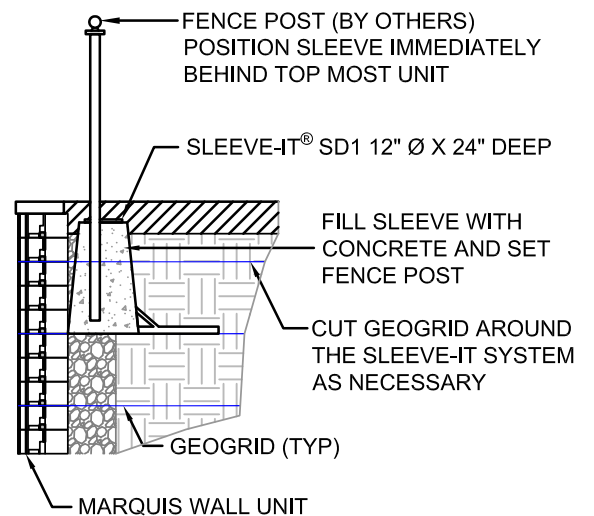

2
1 FENCE POST WITH SLEEVE-IT 1224R



201 Park Ave.
Woodbury, NJ 08096
(800)-444-3679
www.ephenry.com

TITLE: MARQUIS WALL
TYPICAL POST INSTALLATION DETAIL

SCALE: NOT TO SCALE